


FRLS 200 W


Technical data FRLS 200 W			
Motor data	Symbol	Unit	FRLS202 __ 06 __
Nominal voltage	V	VAC	220
Nominal power	W	W	200
Nominal torque	T_C	Nm	0.64
Nominal current	I_C	A_{eff}	1.7
Peak torque for 1 sec.	T_P	Nm	1.92
Peak current for 1 sec.	I_P	A_{eff}	5.1
Nominal speed	n_N	rpm	3,000
Maximum speed for 1 sec.	n_{max}	rpm	4,500
Torque constant	K_T	Nm/ A_{eff}	0.43
Voltage constant	K_e	$V_{eff}/(1,000 \text{ rpm})$	26
Winding resistance ¹⁾	R	Ω	4,3
Winding inductance ¹⁾	L	mH	13
Mass inertia of rotor	J	$kgm^2 \times 10^{-4}$	0.17
Mass inertia of rotor with brake	J	$kgm^2 \times 10^{-4}$	0.21
Motor weight	M	kg	0.95
Motor weight with brake	M	kg	1.5
Motor insulation class			A
Motor brake (optional) ²⁾			
Braking torque (static)	T_b	Nm	1.3
Power supply	V	VDC	$24 \pm 10 \%$
Power consumption	A	A	0.3
Rated input	W	W	7.7
Response time open	t_0	ms	30.0
Response time close	t_R	ms	20.0

¹⁾ Line to line


²⁾ The motor brakes are holding brakes only, not operating brakes

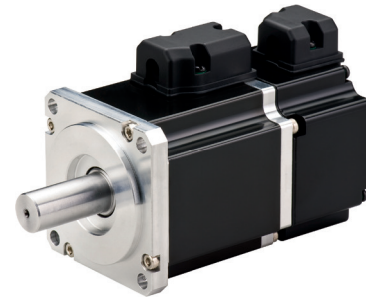

Torque-speed curve FRLS 200 W:

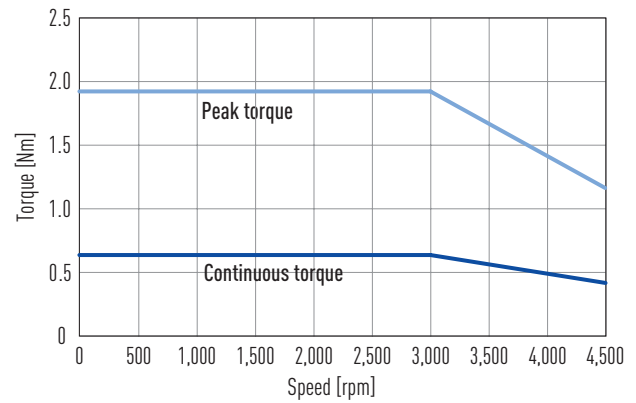

Dimensions FRLS 200 W:

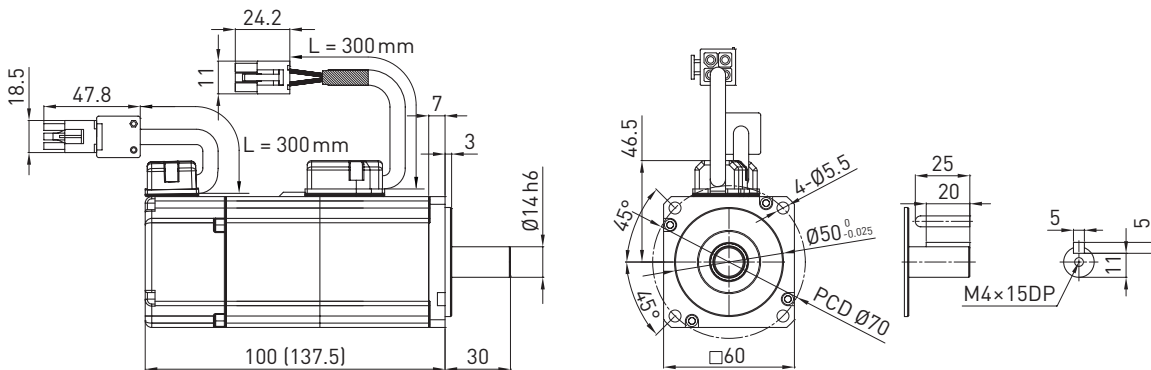

Values in brackets apply to model with motor brake